SunClad USA Doors




Out-Swing Door Sizes

- 1. The drawings in this catalog are not necessarily all scaled the same. Drawings are intended for visual reference only and are not suitable for architectural purposes.
- 2. Rough Opening Width and Height should typically be 1/2" greater than the Unit/Frame Dimension.
- 3. Glass Sizes and additional dimensions are available on the Dimensions page at the back of this section.
- 4. Unit may be mulled with others to form a combination unit. Rough Opening should be adjusted to account for the additional units. Generally, add the unit dimensions
- together and add 1/2'' for the rough opening.
- 5. The standard jamb depth is 4-9/16". Jamb Extension may be added to increase the jamb depth to 6-9/16".
- 6. Unit Sizes have a tolerance of + / .0625" per frame/unit dimensions

1-Panel Units Fixed Only								
ne H.	ht	ight		31 1/4″	33 1/4″	37 1/4″	40 1/4″	Unit/Frame Width
/Frar	Heig	ЧHе						R.O. Width
Unit,	R.O.	Pane	22.72″	28.72″	30.72″	34.72″	37.72″	Panel Width
79 1/2"	80"	77.033"						
82 1/2"	83"	80.033"						
95 1/2"	-96	93.033"						
	82 1/2" 79 1/2" Unit/Frame H.	82 1/2" 79 1/2" Unit/Frame H. 83" 80" R.O. Height	82 1/2" 79 1/2" Unit/Frame H. 83" 80" R.O. Height 80.033" 77.033" Panel Height	Fixed Only Hamel J. 2 1/2.1 83" 80.033.1 80.033.1 25.1/4" 80.1 25.1/4" 80.1 25.1/4" 80.1 25.1/4" 80.1 25.1/4" 80.1 80.1 80.1 25.1/4" 80.1 80.1 80.1 25.1/4" 90.1 10.1 90.1 <td< td=""><td>Home Fixed Only 101 25 1/4" 31 1/4" 25 1/4" 31 3/4" 25 3/4" 101 25 3/4" 28.72" 102 8 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1034 102 102 1035 102 102 1036 102 102 1037 102 102 1037 102 102 1037 102 102 1037 102 102 1038 102 102 1039 102 102 1039 102 102 1040</td></td<> <td>Total Sector Fixed Only 12012 25 1/4" 31 1/4" 33 1/4" 25 1/4" 31 3/4" 33 3/4" 25 3/4" 31 3/4" 33 3/4" 2010 22.72" 28.72" 30.72" 1000 1100 1100 1100 1100 1010 1100 1100 1100 1100 1020 1000 1100 1100 1100 1010 1000 1100 1100 1100 1010 1000 1100 1100 1100 1010 1000 1100 1100 1100 1010 1000 1100 1100 1100 1010 1100 1100 1100 1100 1010 1100 1100 1100 1100 1010 1100 1100 1100 1100 1010 1100 1100 1100 1100 1010 1100 1100 1100 1100 1010 1100 1100 1100 1100 1010<</td> <td>Hired Only Fixed Only 1</td> <td>Image: Problem state st</td>	Home Fixed Only 101 25 1/4" 31 1/4" 25 1/4" 31 3/4" 25 3/4" 101 25 3/4" 28.72" 102 8 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1033 102 102 1034 102 102 1035 102 102 1036 102 102 1037 102 102 1037 102 102 1037 102 102 1037 102 102 1038 102 102 1039 102 102 1039 102 102 1040	Total Sector Fixed Only 12012 25 1/4" 31 1/4" 33 1/4" 25 1/4" 31 3/4" 33 3/4" 25 3/4" 31 3/4" 33 3/4" 2010 22.72" 28.72" 30.72" 1000 1100 1100 1100 1100 1010 1100 1100 1100 1100 1020 1000 1100 1100 1100 1010 1000 1100 1100 1100 1010 1000 1100 1100 1100 1010 1000 1100 1100 1100 1010 1000 1100 1100 1100 1010 1100 1100 1100 1100 1010 1100 1100 1100 1100 1010 1100 1100 1100 1100 1010 1100 1100 1100 1100 1010 1100 1100 1100 1100 1010 1100 1100 1100 1100 1010<	Hired Only Fixed Only 1	Image: Problem state st

Operation Options for In-Swing Doors - Specify the operation for the door as shown below. Operation is as viewed from the outside.




SunClad USA Doors



True French Out-Swing Door Sizes

- 1. The drawings in this catalog are not necessarily all scaled the same. Drawings are intended for visual reference only and are not suitable for architectural purposes.
- 2. Rough Opening Width and Height should typically be 1/2" greater than the Unit/Frame Dimension.
- 3. Glass Sizes and additional dimensions are available on the Dimensions page at the back of this section.
- 4. Unit may be mulled with others to form a combination unit. Rough Opening should be adjusted to account for the additional units. Generally, add the unit dimensions together and add 1/2" for the rough opening.
- The standard jamb depth is 4-9/16". Jamb Extension may be added to increase the jamb depth to 6-9/16".
- 6. Unit Sizes have a tolerance of + / .0625" per frame/unit dimensions

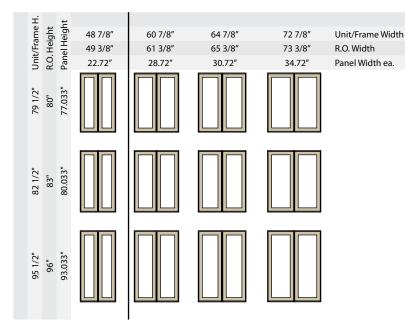

Operation Options for True French Doors - Specify the operation for the door as shown below. Operation is as viewed from the outside.

