




Awning Sizes


- The window drawings in this catalog are not necessarily all scaled the same. Drawings are intended for visual reference only and are not suitable for architectural purposes.
- The Call Size is a unique identification number for the product type and size. Use this number to specify unit and size wanted.
- Unit / Frame Width = Call Width + 4" x Qty wide. Specified in inches.
- Unit / Frame Height = Call Height + 4". Specified in inches.
- Rough Opening Width = Unit/Frame Width + 1/2". Specified in feet and inches.
- Rough Opening Height = Unit/Frame Height + 1/2". Specified in feet and inches.
- Clear Opening or egress dimensions are available on the Dimensions page at the back of this section.
- A dimension page at the back of this section gives precise specifications for all the major dimensions for this product. Please refer to it for additional size information.
- All units are available with or without grilles. Drawings show the standard grille lite division for the product as a stand-alone unit. When mulling with other units grille lite division may vary.
- Unit may be mullered with others to form a combination unit. Rough Opening should be adjusted to account for the additional units. Generally, add the unit dimensions together and add 1/2" for the rough opening.
- The standard jamb depth is 4-9/16". Jamb Extension may be added to increase the jamb depth up to 7-9/16". Specify exact jamb depth needed.
- Exterior Dimensions with Brick Mold, add 2.75" to the width and add 2" to the height. Note: interior frame and rough opening dimensions are not affected.
- Tempered glass is stocked for certain sizes. These sizes are marked with shaded glass. Stock Tempered glass is available for standard delivery schedule, all other tempered glass is special order.

Call Height	Unit/Frame Height	R.O. Height	28	32	36	44	48	55	60	68	Call Width
			32"	36"	40"	48"	52"	59"	64"	72"	Unit/Frame Width
			2'-8 1/2"	3'-0 1/2"	3'-4 1/2"	4'-0 1/2"	4'-4 1/2"	4'-11 1/2"	5'-4" 1/2"	6'-0 1/2"	R.O. Width
12	16"	1'-4 1/2"	1	6	12	18	24	27	30	33	
			CAW2812	CAW3212	CAW3612	CAW4412	CAW4812	CAW5512	CAW6012	CAW6812	
16	20"	1'-8 1/2"	2	7	13	19	25	28	31	34	
			CAW2816	CAW3216	CAW3616	CAW4416	CAW4816	CAW5516	CAW6016	CAW6816	
20	24"	2'-0 1/2"	3	8	14	20	26	29	32	35	
			CAW2820	CAW3220	CAW3620	CAW4420	CAW4820	CAW5520	CAW6020	CAW6820	
24	28"	2'-4 1/2"	4	9	15	21					
			CAW2824	CAW3224	CAW3624	CAW4424					
28	32"	2'-8 1/2"	5	10	16	22					
			CAW2828	CAW3228	CAW3628	CAW4428					
32	36"	3'-0 1/2"		11	17	23					
				CAW3232	CAW3632	CAW4432					


Grille Patterns

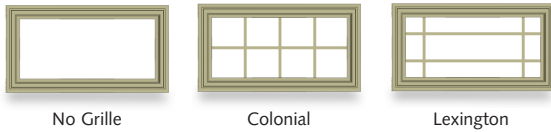

Operator Location Outside



Inside



Standard location is left (shown) as viewed from the outside. Optional right side location is also available. Must be specified.